

# HYT 271/939P/221

## Digital Humidity and Temperature Module

Optimal for general purpose humidity applications with best accuracy at 0 – 50 °C and 0 – 90 % RH

### Benefits & characteristics

- Fast response time (HYT 271)
- Low hysteresis
- Low drift
- Stable at high humidity
- Custom specific versions
- Humidity and temperature sensor with excellent accuracy
- Easy integration, interchangeable without adjustments
- I<sup>2</sup>C protocol
- Fully calibrated and temperature compensated

### The HYT humidity module family

#### HYT 271

The fastest and smallest of the HYT family is the 271. The digital module with only 10.2 x 5.1 x 1.8 mm size offers a wide application window and an optimal price-performance-ratio. It is only the best solution for fast measurements or sophisticated mass applications.



#### HYT 221

The round stainless-steel casing can be easily fitted into housing openings and sealed against a wall with the use of an O-Ring. A textile membrane filter with hydrophobic coating protects the sensor from dust while enabling a compact assembly with high dynamic responsiveness.



#### HYT 939P

The strongest of the HYT modules in TO39 packaging particularly features mechanical robustness. Through glass to metal seals and welding of the stainless-steel cap onto the metal header, it is pressure tight up to 16 bar.





## Custom specific versions:

If a higher accuracy or different sensor design is needed, the modular design of HYT allows for high flexibility – the sensor, its calibration and assembly can easily be adapted to develop tailor-made modules fulfilling individual demands. Customized IST AG humidity modules feature extraordinary response times, high accuracies in condensing environment or low humidity conditions. Please contact us for custom specific versions.



## Technical Data



	Humidity			Temperature		
Accuracy:	±1.8 % RH at +23 °C (0 % RH to 90 % RH)			±0.2 °C (0 °C to +60 °C)		
Reproducibility:	±0.2 % RH			±0.1 °C		
Resolution:	0.03 % RH			0.015 °C		
Response time $t_{63}^1$ :	<b>HYT 271</b>	<b>HYT 221</b>	<b>HYT 939P</b>	<b>HYT 271</b>	<b>HYT 221</b>	<b>HYT 939P</b>
	< 4 s	< 10 s	< 10 s	< 5 s	< 10 s	< 10 s
Long-term drift:	< 0.5 % RH/a (at 23 °C and 30 % RH to 70 % RH in synthetic air)			< 0.05 °C/a		
	Exposure to VOCs can lead to higher values. Please find more details in HYT application note.					
Measurement principle:	Capacitive polymer humidity sensor			PTAT (integrated)		
Hysteresis:	< ±1 % RH at 25 °C					
Operating voltage:	2.7 V to 5.5 V					
Current consumption (nominal):	< 22 µA at 1 Hz measuring rate; 850 µA max.					
Current consumption (sleep):	< 1 µA					
Digital interface:	I <sup>2</sup> C, address 0x28 or alternative address					
Operating voltage (limits):	-0.3 V to 6 V					
Measuring range <sup>2</sup> :	0 °C to 50 °C, 0 % RH to 90 % RH For usage in condensing environment please refer to HYT application note.					
Operating range <sup>3</sup> :	-40 to 125 °C, 0 to 100 % RH Non-condensing. For usage in condensing environment please refer to HYT application note.					
Storage conditions:	-5 to 30 °C, < 30 % RH Please refer to HYT application note for packaging recommendations.					

<sup>1</sup>) The response time is often measured for increasing humidity steps, whereas physics predicts that decreasing humidity leads to generally far longer response times for capacitive humidity sensors. IST always measures response times for decreasing humidity values, since this is the worst case.

<sup>2</sup>) In the specified range the modules measure within typical tolerance ±1.8 % RH, see Fig. 1. At T > 50 °C and/or high humidity over a long period of time, an offset in the % RH signal can occur. Please refer to HYT application note for reconditioning procedure.

<sup>3</sup>) Specifies the range the modules work without permanent damage. % RH/T tolerances etc. cannot be guaranteed in these conditions.

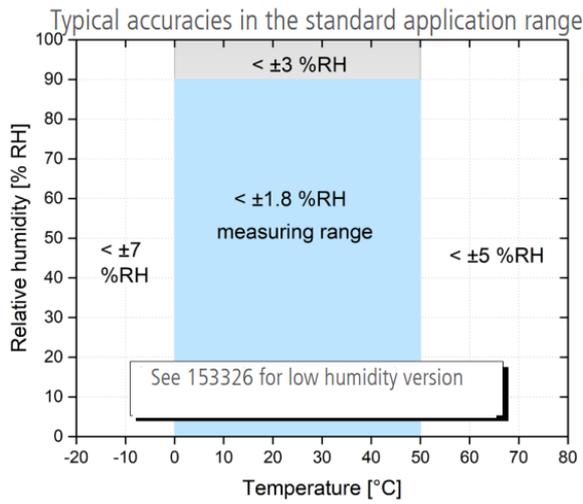


Fig 1: Typical tolerance of the % RH measurement


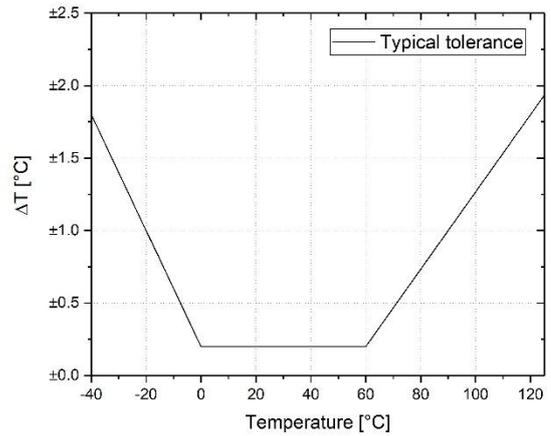



Fig 2: Typical tolerance of the temperature measurement

## HYT 271

### Mechanical Dimensions

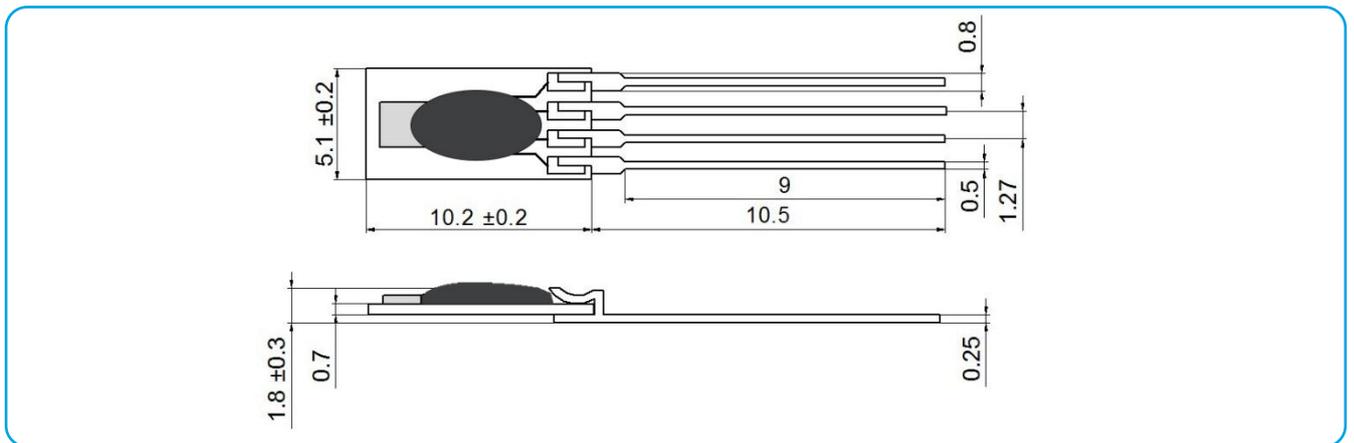

### Pin Assignment

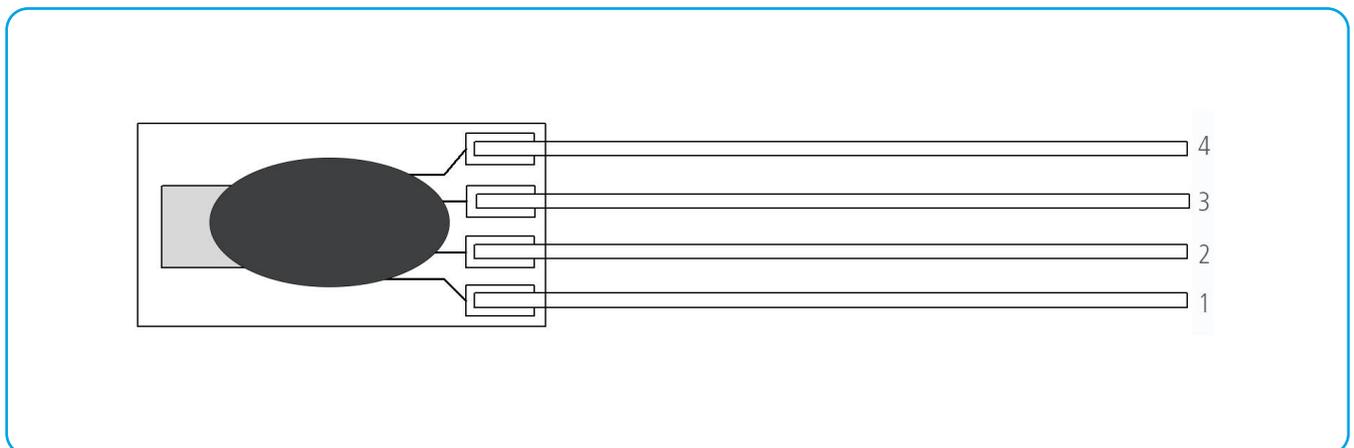


1	2	3	4
SDA	GND	VDD	SCL




# HYT 221

## Mechanical Dimensions

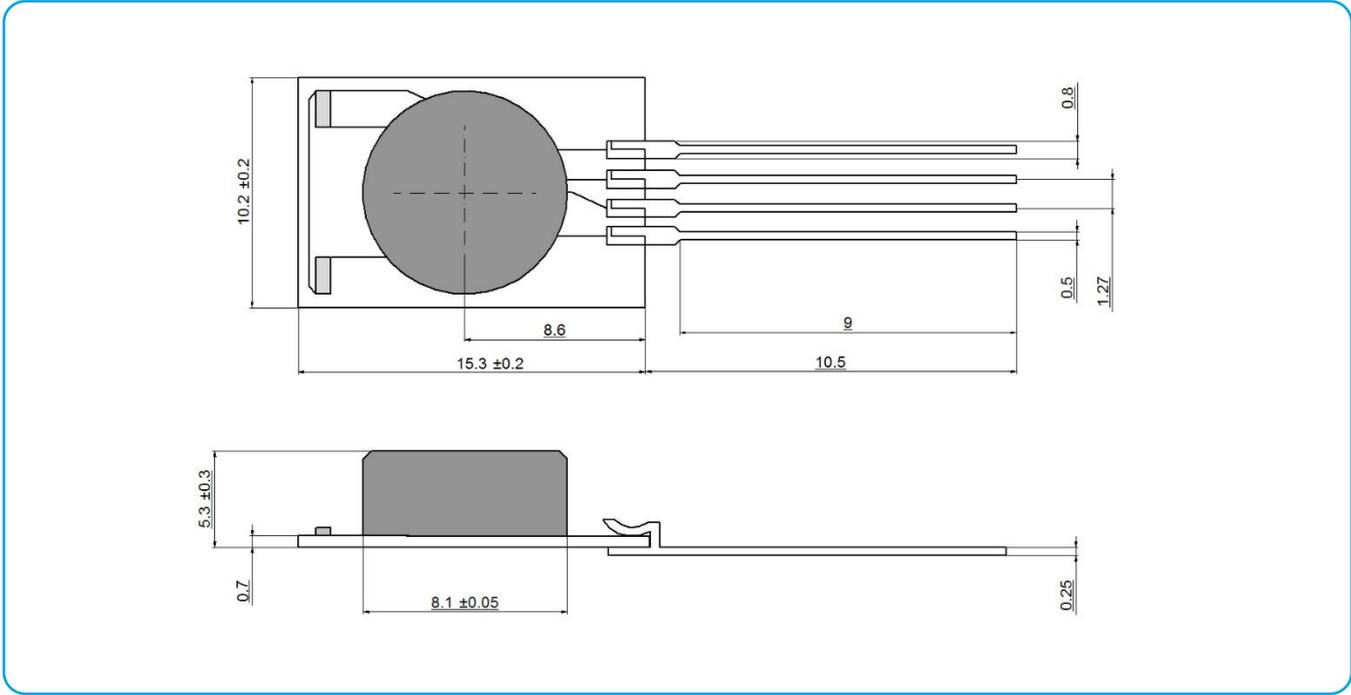

## Pin Assignment

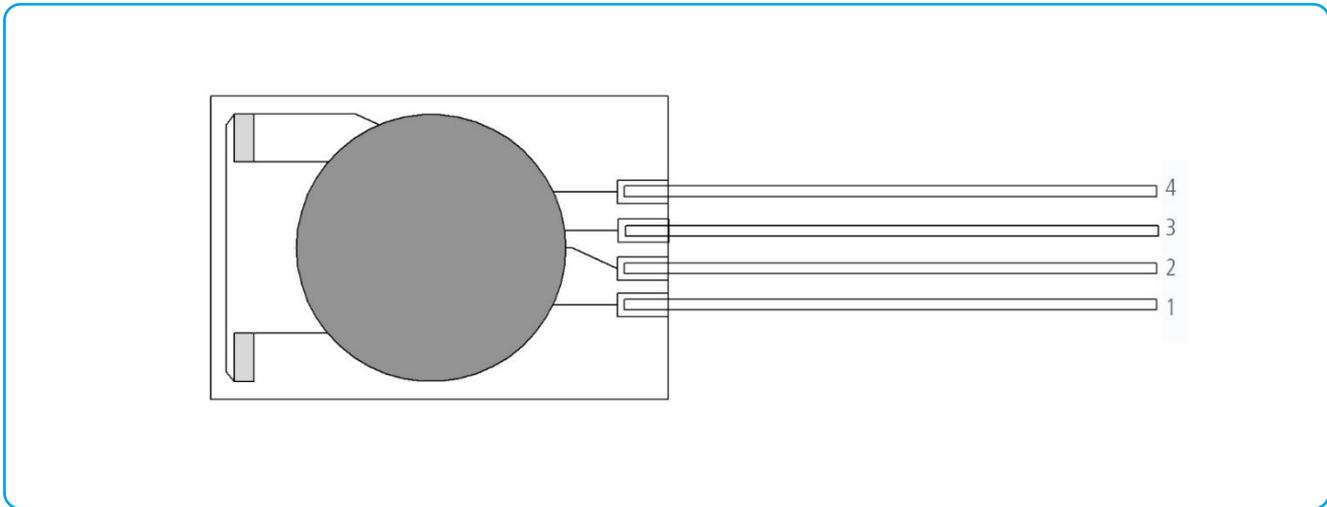


1	2	3	4
SDA	GND	VDD	SCL




# HYT 939P

## Mechanical Dimensions

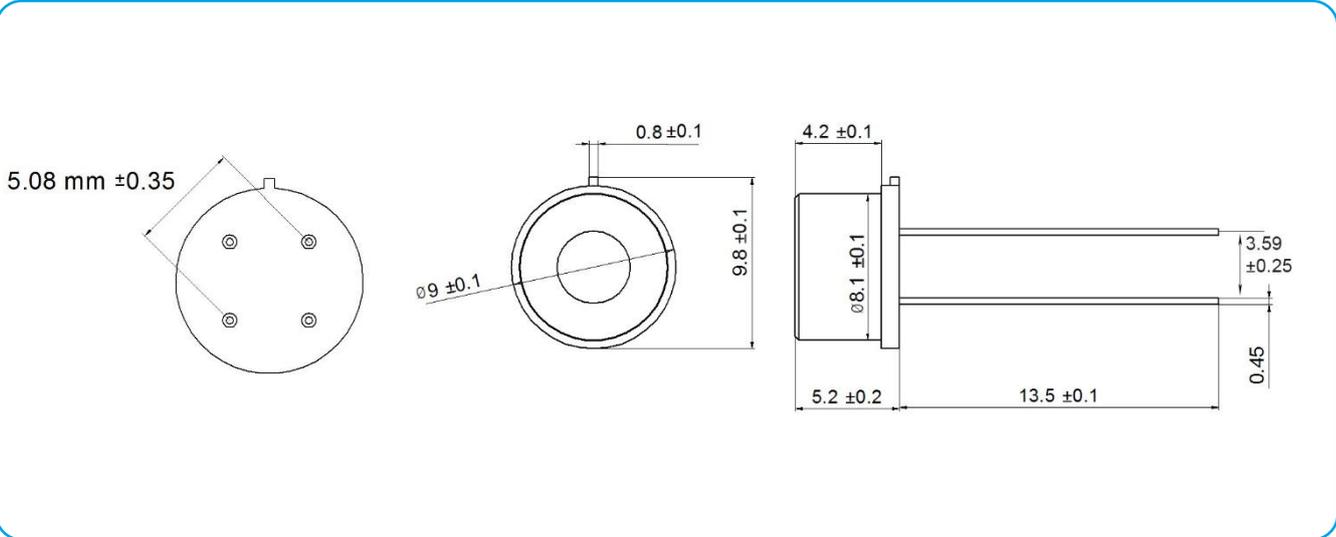

## Pin Assignment

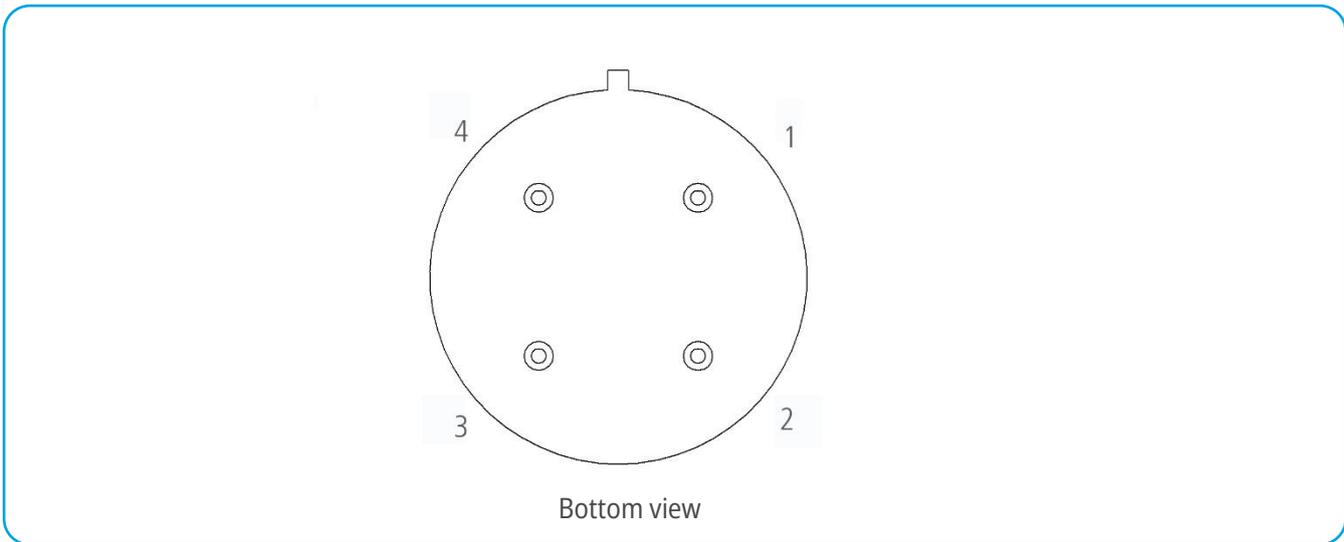

1	2	3	4
SCL	VCC	GND	SDA



## Order Information



Vesion	HYT 271	HYT 221	HYT 939P
Order code	153349	153680	153658

## Additional Documents

	Document name:
Application Note:	AHHYTM_E

Please find software code examples on [www.ist-ag.com](http://www.ist-ag.com).



Innovative Sensor Technology IST AG • Stegrütistrasse 14 • 9642 Ebnat-Kappel • Switzerland  
+41 71 992 01 00 • [info@ist-ag.com](mailto:info@ist-ag.com) • [www.ist-ag.com](http://www.ist-ag.com)

Technical specifications are subject to change without prior notice. The information contained in this data sheet has been carefully reviewed and is believed to be accurate; however, no liability is assumed for any errors or omissions. Continuous exposure to extreme operating conditions may impact product lifetime or reliability. The customer is solely responsible for assessing the suitability and fitness of the product for their specific application. This product is not designed, authorized, or warranted for use in life support or safety-critical applications. The customer agrees to hold the supplier harmless from any claims, damages, or liabilities arising from such use. No explicit or implied warranties, including but not limited to warranties of merchantability or fitness for a particular purpose, are provided. The material provided herein may not be reproduced, adapted, merged, translated, stored, or utilized in any form without prior written consent from the copyright holder. No transfer of any intellectual property rights is granted or implied. All rights reserved.