



400 °C Series



Platinum sensor with wires

For medium temperatures




Benefits & characteristics



- Outstanding long-term stability
- Excellent solderability
- Low self-heating
- Vibration and temperature shock resistant
- Paired and grouped sensors available
- 1/5 DIN and 1/10 DIN
- Customer-specific sensor available upon request



Illustration ¹⁾

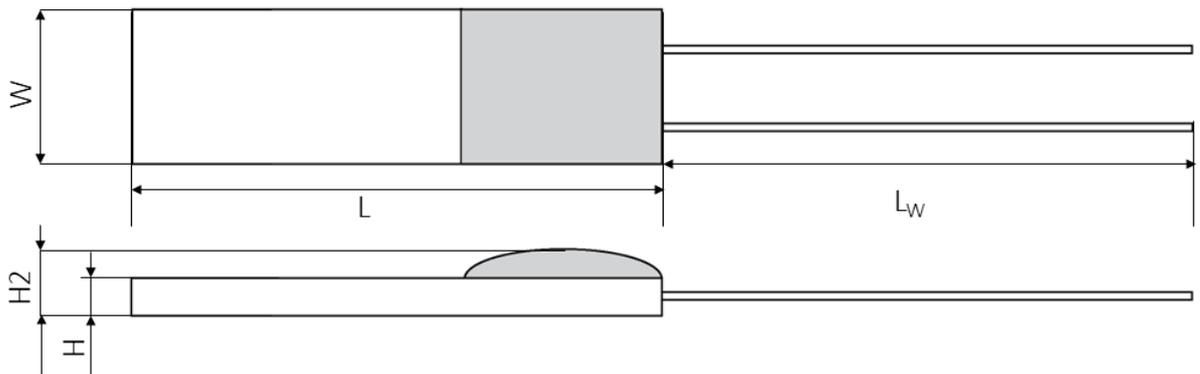

¹⁾ for actual size see dimensions in order information

H = Substrate Height

H2 = Height

W = Width

L = Length

L_w = Wire length

Dimension tolerances:

W ±0.2 mm, L ±0.2 mm, H ±0.1 mm, H2 ±0.3 mm,

L_w (up to 30 mm) ±1 mm



Technical Data

Operating temperature range:	-200 °C to +400 °C	
Nominal resistance:*	100 Ω at 0 °C	
	500 Ω at 0 °C	
	1000 Ω at 0 °C	
Characteristics curve:*	3850 ppm/K	
Long-term stability:	< 0.04 % at 1000 h at maximal operating temperature	
Tolerance class: * (dependent on temperature range)	iST reference	
	IEC 60751 F0.15	A
	IEC 60751 F0.3	B
	IEC 60751 F0.6	C
	IEC 60751 F0.1	Y
	1/5 IEC 60751 F0.3	K*
	1/10 IEC 60751 F0.3	K*
Connection:*	Ag-wire, Ø 0.25 mm (solderable, weldable)	
Alternative wire construction:*	Perpendicular wires	
	Inverted wires	
Wire insulation	1) Azurro	1.1 @ 0.65 mm blue
	2) P23	1.2 @ 0.65 mm green
Recommended applied current: ³⁾	1 mA at 100 Ω	
³⁾ Self-heating must be considered	0.5 mA at 500 Ω	
	0.3 mA at 1000 Ω	
Other alternatives:*	Housed in round ceramics (for dry environments only)	
	<ul style="list-style-type: none"> ▪ See data sheet DTP_Round_Housing_E 	
	Grouped and paired	
	Substrate thickness	

* Customer-specific alternatives available



Order Information



Nominal Resistance	Size	Dimensions (L x W x H / H2; L _w in mm)	Class*	Order code	Product name (secondary reference)	Wire length in mm	Special
4W (Ag-wire, Ø 0.25 mm)							
100 Ω	161	1.6 x 1.2 x 0.25 / 0.6; 10.0	F0.1 (class Y)	100129	P0K1.161.4W.Y.010	10	
100 Ω	161	1.6 x 1.2 x 0.25 / 0.6; 10.0	F0.15 (class A)	100128	P0K1.161.4W.A.010	10	
100 Ω	161	1.6 x 1.2 x 0.25 / 0.6; 10.0	F0.3 (class B)	100127	P0K1.161.4W.B.010	10	
500 Ω	161	1.6 x 1.2 x 0.25 / 0.6; 10.0	F0.1 (class Y)	100216	P0K5.161.4W.Y.010	10	
500 Ω	161	1.6 x 1.2 x 0.25 / 0.6; 10.0	F0.15 (class A)	100215	P0K5.161.4W.A.010	10	
500 Ω	161	1.6 x 1.2 x 0.25 / 0.6; 10.0	F0.3 (class B)	100214	P0K5.161.4W.B.010	10	
1000 Ω	161	1.6 x 1.2 x 0.25 / 0.6; 10.0	F0.1 (class Y)	100244	P1K0.161.4W.Y.010	10	
1000 Ω	161	1.6 x 1.2 x 0.25 / 0.6; 10.0	F0.15 (class A)	100243	P1K0.161.4W.A.010	10	
1000 Ω	161	1.6 x 1.2 x 0.25 / 0.6; 10.0	F0.3 (class B)	100242 ²⁾	P1K0.161.4W.B.010	10	
100 Ω	202	1.8 x 2.0 x 0.65 / 1.1; 7.0	F0.1 (class Y)	On request	P0K1.202.4W.Y.007	7	
100 Ω	202	1.8 x 2.0 x 0.65 / 1.1; 7.0	F0.15 (class A)	On request	P0K1.202.4W.A.007	7	
100 Ω	202	1.8 x 2.0 x 0.65 / 1.1; 7.0	F0.3 (class B)	101457 ¹⁾	P0K1.202.4W.B.007	7	
150 Ω	202	1.8 x 2.0 x 0.65 / 1.1; 10.0	F0.1 (class Y)	On request	P150.202.4W.Y.010	10	
150 Ω	202	1.8 x 2.0 x 0.65 / 1.1; 10.0	F0.15 (class A)	On request	P150.202.4W.A.010	10	
150 Ω	202	1.8 x 2.0 x 0.65 / 1.1; 10.0	F0.3 (class B)	101548 ¹⁾	P150.202.4W.B.010	10	
350 Ω	202	1.8 x 2.0 x 0.65 / 1.1; 10.0	F0.1 (class Y)	On request	P350.202.4W.Y.010	10	
350 Ω	202	1.8 x 2.0 x 0.65 / 1.1; 10.0	F0.15 (class A)	On request	P350.202.4W.A.010	10	
350 Ω	202	1.8 x 2.0 x 0.65 / 1.1; 10.0	F0.3 (class B)	101549 ¹⁾	P350.202.4W.B.010	10	
100 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 7.0	F0.1 (class Y)	On request	P0K1.232.4W.Y.007	7	
100 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 7.0	F0.15 (class A)	100107 ²⁾	P0K1.232.4W.A.007	7	
100 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 7.0	F0.3 (class B)	100106 ²⁾	P0K1.232.4W.B.007	7	
100 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.1 (class Y)	100105	P0K1.232.4W.Y.010	10	
100 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.15 (class A)	100103 ²⁾	P0K1.232.4W.A.010	10	
100 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.3 (class B)	100101 ²⁾	P0K1.232.4W.B.010	10	
500 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.1 (class Y)	On request	P0K5.232.4W.Y.010	10	
500 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.15 (class A)	100437	P0K5.232.4W.A.010	10	
500 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.3 (class B)	100436 ²⁾	P0K5.232.4W.B.010	10	



Nominal Resistance	Size	Dimensions (L x W x H / H2; L _w in mm)	Class*	Order code	Product name (secondary reference)	Wire length in mm	Special
1000 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 7.0	F0.1 (class Y)	On request	P1K0.232.4W.Y.007	7	
1000 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 7.0	F0.15 (class A)	100831	P1K0.232.4W.A.007	7	
1000 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 7.0	F0.3 (class B)	100832 ²⁾	P1K0.232.4W.B.007	7	
1000 Ω	232	2.2 x 2.0 x 0.65 / 1.1; 7.0	F0.1 (class Y)	On request	P1K0.232.4W.Y.007	7	
1000 Ω	232	2.2 x 2.0 x 0.65 / 1.1; 7.0	F0.15 (class A)	101710 ¹⁾	P1K0.232.4W.A.007	7	
1000 Ω	232	2.2 x 2.0 x 0.65 / 1.1; 7.0	F0.3 (class B)	101711 ¹⁾	P1K0.232.4W.B.007	7	
1000 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.1 (class Y)	On request	P1K0.232.4W.Y.010	10	
1000 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.15 (class A)	101582 ¹⁾	P1K0.232.4W.A.010	10	
1000 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.3 (class B)	101583 ¹⁾	P1K0.232.4W.B.010	10	
1000 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.1 (class Y)	100253 ¹⁾	P1K0.232.4W.Y.010	10	
1000 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.15 (class A)	On request	P1K0.232.4W.A.010	10	
1000 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.3 (class B)	On request	P1K0.232.4W.B.010	10	
1000 Ω	232	2.3 x 2.0 x 0.65 / 1.3; 15.0	F0.1 (class Y)	156416	P1K0.232.4W.Y.015	15	ESD-optimized design
1000 Ω	232	2.3 x 2.0 x 0.65 / 1.3; 15.0	F0.15 (class A)	156417	P1K0.232.4W.A.015	15	ESD-optimized design
1000 Ω	232	2.3 x 2.0 x 0.65 / 1.3; 15.0	F0.3 (class B)	156418	P1K0.232.4W.B.015	15	ESD-optimized design
100 Ω	216	2.4 x 1.7 x 0.65 / 1.1; 7.0	F0.1 (class Y)	On request	P0K1.216.4W.Y.007	7	
100 Ω	216	2.4 x 1.7 x 0.65 / 1.1; 7.0	F0.15 (class A)	On request	P0K1.216.4W.A.007	7	
100 Ω	216	2.4 x 1.7 x 0.65 / 1.1; 7.0	F0.3 (class B)	101605 ¹⁾	P0K1.216.4W.B.007	7	
100 Ω	216	2.4 x 1.7 x 0.65 / 1.2; 15.0	F0.1 (class Y)	On request	P0K1.216.4W.Y.015	15	
100 Ω	216	2.4 x 1.7 x 0.65 / 1.2; 15.0	F0.15 (class A)	101217 ¹⁾	P0K1.216.4W.A.015	15	
100 Ω	216	2.4 x 1.7 x 0.65 / 1.2; 15.0	F0.3 (class B)	101216 ¹⁾	P0K1.216.4W.B.015	15	
100 Ω	516	5.0 x 1.6 x 0.65 / 1.2; 10.0	F0.1 (class Y)	On request	P0K1.516.4W.Y.010	10	
100 Ω	516	5.0 x 1.6 x 0.65 / 1.2; 10.0	F0.15 (class A)	On request	P0K1.516.4W.A.010	10	
100 Ω	516	5.0 x 1.6 x 0.65 / 1.2; 10.0	F0.3 (class B)	On request	P0K1.516.4W.B.010	10	
500 Ω	516	5.0 x 1.6 x 0.65 / 1.2; 15.0	F0.1 (class Y)	On request	P0K5.516.4W.Y.015	15	
500 Ω	516	5.0 x 1.6 x 0.65 / 1.2; 15.0	F0.15 (class A)	100225	P0K5.516.4W.A.015	15	
500 Ω	516	5.0 x 1.6 x 0.65 / 1.2; 15.0	F0.3 (class B)	On request	P0K5.516.4W.B.015	15	
1000 Ω	516	5.0 x 1.6 x 0.65 / 1.2; 10.0	F0.1 (class Y)	100267	P1K0.516.4W.Y.010	10	
1000 Ω	516	5.0 x 1.6 x 0.65 / 1.2; 10.0	F0.15 (class A)	100265	P1K0.516.4W.A.010	10	
1000 Ω	516	5.0 x 1.6 x 0.65 / 1.2; 10.0	F0.3 (class B)	100263 ²⁾	P1K0.516.4W.B.010	10	



Nominal Resistance	Size	Dimensions (L x W x H / H2; L _w in mm)	Class*	Order code	Product name (secondary reference)	Wire length in mm	Special
100 Ω	520	5.0 x 2.0 x 0.65 / 1.2; 10.0	F0.1 (class Y)	100160	P0K1.520.4W.Y.010	10	
100 Ω	520	5.0 x 2.0 x 0.65 / 1.2; 10.0	F0.15 (class A)	100158	P0K1.520.4W.A.010	10	
100 Ω	520	5.0 x 2.0 x 0.65 / 1.2; 10.0	F0.3 (class B)	100156	P0K1.520.4W.B.010	10	
500 Ω	520	5.0 x 2.0 x 0.65 / 1.2; 10.0	F0.1 (class Y)	On request	P0K5.520.4W.Y.010	10	
500 Ω	520	5.0 x 2.0 x 0.65 / 1.2; 10.0	F0.15 (class A)	100508	P0K5.520.4W.A.010	10	
500 Ω	520	5.0 x 2.0 x 0.65 / 1.2; 10.0	F0.3 (class B)	100435 ²⁾	P0K5.520.4W.B.010	10	
500 Ω	520	5.0 x 2.0 x 0.65 / 1.2; 15.0	F0.1 (class Y)	100232	P0K5.520.4W.Y.015	15	
500 Ω	520	5.0 x 2.0 x 0.65 / 1.2; 15.0	F0.15 (class A)	100231	P0K5.520.4W.A.015	15	
500 Ω	520	5.0 x 2.0 x 0.65 / 1.2; 15.0	F0.3 (class B)	100230 ²⁾	P0K5.520.4W.B.015	15	
1000 Ω	520	5.0 x 2.0 x 0.65 / 1.2; 10.0	F0.1 (class Y)	100276	P1K0.520.4W.Y.010	10	
1000 Ω	520	5.0 x 2.0 x 0.65 / 1.2; 10.0	F0.15 (class A)	100274	P1K0.520.4W.A.010	10	
1000 Ω	520	5.0 x 2.0 x 0.65 / 1.2; 10.0	F0.3 (class B)	100272 ²⁾	P1K0.520.4W.B.010	10	
1000 Ω	520	5.0 x 2.0 x 0.65 / 1.3; 40.0	F0.1 (class Y)	On request	P1K0.520.4W.Y.040	40	
1000 Ω	520	5.0 x 2.0 x 0.65 / 1.3; 40.0	F0.15 (class A)	On request	P1K0.520.4W.A.040	40	
1000 Ω	520	5.0 x 2.0 x 0.65 / 1.3; 40.0	F0.3 (class B)	On request	P1K0.520.4W.B.040	40	
1000 Ω	520	5.0 x 2.0 x 0.65 / 1.1; 1000.0	F0.1 (class Y)	On request	P1K0.520.4W.Y.1000	1000	
1000 Ω	520	5.0 x 2.0 x 0.65 / 1.1; 1000.0	F0.15 (class A)	101479 ¹⁾	P1K0.520.4W.A.1000	1000	
1000 Ω	520	5.0 x 2.0 x 0.65 / 1.1; 1000.0	F0.3 (class B)	On request	P1K0.520.4W.B.1000	1000	
100 Ω	538	5.0 x 3.9 x 0.65 / 1.2; 10.0	F0.1 (class Y)	On request	P0K1.538.4W.Y.010	10	
100 Ω	538	5.0 x 3.9 x 0.65 / 1.2; 10.0	F0.15 (class A)	100180	P0K1.538.4W.A.010	10	
100 Ω	538	5.0 x 3.9 x 0.65 / 1.2; 10.0	F0.3 (class B)	100179 ²⁾	P0K1.538.4W.B.010	10	
1000 Ω	538	5.0 x 3.9 x 0.65 / 1.2; 10.0	F0.1 (class Y)	On request	P1K0.538.4W.Y.010	10	
1000 Ω	538	5.0 x 3.9 x 0.65 / 1.2; 10.0	F0.15 (class A)	100332 ²⁾	P1K0.538.4W.A.010	10	
1000 Ω	538	5.0 x 3.9 x 0.65 / 1.2; 10.0	F0.3 (class B)	100331	P1K0.538.4W.B.010	10	
100 Ω	505	5.0 x 5.0 x 0.65 / 1.3; 10.0	F0.1 (class Y)	On request	P0K1.505.4W.Y.010	10	
100 Ω	505	5.0 x 5.0 x 0.65 / 1.3; 10.0	F0.15 (class A)	On request	P0K1.505.4W.A.010	10	
100 Ω	505	5.0 x 5.0 x 0.65 / 1.3; 10.0	F0.3 (class B)	On request	P0K1.505.4W.B.010	10	
1000 Ω	505	5.0 x 5.0 x 0.65 / 1.2; 10.0	F0.1 (class Y)	On request	P1K0.505.4W.Y.010	10	
1000 Ω	505	5.0 x 5.0 x 0.65 / 1.2; 10.0	F0.15 (class A)	On request	P1K0.505.4W.A.010	10	
1000 Ω	505	5.0 x 5.0 x 0.65 / 1.2; 10.0	F0.3 (class B)	100296 ²⁾	P1K0.505.4W.B.010	10	



Nominal Resistance	Size	Dimensions (L x W x H / H2; L _w in mm)	Class*	Order code	Product name (secondary reference)	Wire length in mm	Special
100 Ω	102	10.0 x 2.0 x 0.65 / 1.3; 10.0	F0.1 (class Y)	100198	P0K1.102.4W.Y.010	10	
100 Ω	102	10.0 x 2.0 x 0.65 / 1.3; 10.0	F0.15 (class A)	100196	P0K1.102.4W.A.010	10	
100 Ω	102	10.0 x 2.0 x 0.65 / 1.3; 10.0	F0.3 (class B)	100194 ²⁾	P0K1.102.4W.B.010	10	
500 Ω	102	10.0 x 2.0 x 0.65 / 1.3; 10.0	F0.1 (class Y)	On request	P0K5.102.4W.Y.010	10	
500 Ω	102	10.0 x 2.0 x 0.65 / 1.3; 10.0	F0.15 (class A)	101014	P0K5.102.4W.A.010	10	
500 Ω	102	10.0 x 2.0 x 0.65 / 1.3; 10.0	F0.3 (class B)	101019 ²⁾	P0K5.102.4W.B.010	10	
1000 Ω	102	10.0 x 2.0 x 0.65 / 1.3; 10.0	F0.1 (class Y)	100306	P1K0.102.4W.Y.010	10	
1000 Ω	102	10.0 x 2.0 x 0.65 / 1.3; 10.0	F0.15 (class A)	100303 ²⁾	P1K0.102.4W.A.010	10	
1000 Ω	102	10.0 x 2.0 x 0.65 / 1.3; 10.0	F0.3 (class B)	100301	P1K0.102.4W.B.010	10	

4SW (Ag-wire, Ø 0.25 mm, perpendicular wire)

100 Ω	161	1.6 x 1.2 x 0.25 / 0.6; 10.0	F0.1 (class Y)	On request	P0K1.161.4SW.Y.010	10	
100 Ω	161	1.6 x 1.2 x 0.25 / 0.6; 10.0	F0.15 (class A)	100587	P0K1.161.4SW.A.010	10	
100 Ω	161	1.6 x 1.2 x 0.25 / 0.6; 10.0	F0.3 (class B)	100412 ²⁾	P0K1.161.4SW.B.010	10	
1000 Ω	161	1.6 x 1.2 x 0.25 / 0.6; 10.0	F0.1 (class Y)	On request	P1K0.161.4SW.Y.010	10	
1000 Ω	161	1.6 x 1.2 x 0.25 / 0.6; 10.0	F0.15 (class A)	100401	P1K0.161.4SW.A.010	10	
1000 Ω	161	1.6 x 1.2 x 0.25 / 0.6; 10.0	F0.3 (class B)	100327	P1K0.161.4SW.B.010	10	
100 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.1 (class Y)	100930	P0K1.232.4SW.Y.010	10	
100 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.15 (class A)	100630	P0K1.232.4SW.A.010	10	
100 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.3 (class B)	100734	P0K1.232.4SW.B.010	10	
500 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.1 (class Y)	On request	P0K5.232.4SW.Y.010	10	
500 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.15 (class A)	On request	P0K5.232.4SW.A.010	10	
500 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 10.0	F0.3 (class B)	100397	P0K5.232.4SW.B.010	10	
1000 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 15.0	F0.1 (class Y)	On request	P1K0.232.4SW.Y.015	15	
1000 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 15.0	F0.15 (class A)	100399	P1K0.232.4SW.A.015	15	
1000 Ω	232	2.2 x 2.0 x 0.65 / 1.2; 15.0	F0.3 (class B)	100254	P1K0.232.4SW.B.015	15	

308 (with Ag-wire, Ø 0.15 mm)

100 Ω	308	2.9 x 0.8 x 0.25 / 0.6; 10.0	F0.1 (class Y)	On request	P0K1.308.4W.Y.010	10	
100 Ω	308	2.9 x 0.8 x 0.25 / 0.6; 10.0	F0.15 (class A)	101533	P0K1.308.4W.A.010	10	
100 Ω	308	2.9 x 0.8 x 0.25 / 0.6; 10.0	F0.3 (class B)	101532	P0K1.308.4W.B.010	10	



Nominal Resistance	Size	Dimensions (L x W x H / H2; L _w in mm)	Class*	Order code	Product name (secondary reference)	Wire length in mm	Special
1000 Ω	308	2.9 x 0.8 x 0.25 / 0.6; 10.0	F0.1 (class Y)	On request	P1K0.308.4W.Y.010	10	
1000 Ω	308	2.9 x 0.8 x 0.25 / 0.6; 10.0	F0.15 (class A)	101529	P1K0.308.4W.A.010	10	
1000 Ω	308	2.9 x 0.8 x 0.25 / 0.6; 10.0	F0.3 (class B)	101528	P1K0.308.4W.B.010	10	
1000 Ω	308	2.9 x 0.8 x 0.25 / 0.6; 60.0	F0.1 (class Y)	On request	P1K0.308.4W.Y.060	60	
1000 Ω	308	2.9 x 0.8 x 0.25 / 0.6; 60.0	F0.15 (class A)	101531	P1K0.308.4W.A.060	60	
1000 Ω	308	2.9 x 0.8 x 0.25 / 0.6; 60.0	F0.3 (class B)	101530	P1K0.308.4W.B.060	60	
100 Ω	308	3.0 x 0.8 x 0.25 / 0.6; 18.0	F0.1 (class Y)	On request	P0K1.308.4W.Y.018	18	
100 Ω	308	3.0 x 0.8 x 0.25 / 0.6; 18.0	F0.15 (class A)	On request	P0K1.308.4W.A.018	18	
100 Ω	308	3.0 x 0.8 x 0.25 / 0.6; 18.0	F0.3 (class B)	On request	P0K1.308.4W.B.018	18	

308 (with FKS-wire, Ø 0.15 mm, suitable for Ø 1.0 mm)

100 Ω	308	2.9 x 0.8 x 0.25 / 0.6; 10.0	F0.1 (class Y)	101547	P0K1.308.4W.Y.010.S	10	
100 Ω	308	2.9 x 0.8 x 0.25 / 0.6; 10.0	F0.15 (class A)	On request	P0K1.308.4W.A.010.S	10	
100 Ω	308	2.9 x 0.8 x 0.25 / 0.6; 10.0	F0.3 (class B)	On request	P0K1.308.4W.B.010.S	10	

Additional Documents

Application Note

Document name: APT_E



Order Information

Platinum Sensor - Secondary reference



Material

P = Platinum

TCR

= Pt 3850 ppm/K	G = Pt 3911 ppm/K
U = Pt 3750 ppm/K	W = Pt 3850 ppm/K (extended operating temperature range in class A)

Resistance in Ω at 0°C

Size in mm

Operating temperature range

1 = -50 °C to + 150 °C	6 = -200 °C to + 600 °C
2 = -50 °C to + 200 °C	7 = -200 °C to + 750 °C
3 = -200 °C to + 300 °C	8 = -200 °C to + 850 °C
4 = -200 °C to + 400 °C	10 = -70 °C to + 1000 °C

Connections

S = SIL	FK = Flat wire customer specific
I = Insulated wire	SW = Perpendicular wire
K = Extended wire	L = Insulated stranded wire
W = Wire	E = Enameled Cu-wire
FW = Flat wire	SE = Perpendicular enameled Cu-wire

Tolerance class

A = IEC 60751 F0.15	K = Customer-specific
B = IEC 60751 F0.3	P = Pair
C = IEC 60751 F0.6	G = Group
Y = IEC 60751 F0.1	

Wire length in mm

Special

T = Substrate thickness 0.25 mm	M = Metallized backside
D = Substrate thickness 0.38 mm	U = Inverted welding
R = Round housing	S = Special
W = Sintered powder	

P 0K1. 308. 4 W. B. 010. S



Innovative Sensor Technology IST AG • Stegrütistrasse 14 • 9642 Ebnat-Kappel • Switzerland

+41 71 992 01 00 • info@ist-ag.com • www.ist-ag.com

Technical specifications are subject to change without prior notice. The information contained in this data sheet has been carefully reviewed and is believed to be accurate; however, no liability is assumed for any errors or omissions. Continuous exposure to extreme operating conditions may impact product lifetime or reliability. The customer is solely responsible for assessing the suitability and fitness of the product for their specific application. This product is not designed, authorized, or warranted for use in life support or safety-critical applications. The customer agrees to hold the supplier harmless from any claims, damages, or liabilities arising from such use. No explicit or implied warranties, including but not limited to warranties of merchantability or fitness for a particular purpose, are provided. The material provided herein may not be reproduced, adapted, merged, translated, stored, or utilized in any form without prior written consent from the copyright holder. No transfer of any intellectual property rights is granted or implied. All rights reserved.