




Heated HYT 223

Digital Humidity and Temperature Module Optimal for critical application areas

Benefits & characteristics

- Heatable digital humidity sensor
- With PTFE membrane filter for long term stability
- Calibrated and temperature compensated
- High chemical resistance
- Wide humidity and temperature range
- Excellent humidity/temperature accuracy and stability
- I2C protocol (address 0x28 or alternative address)
- Very low drift
- Interchangeable without adjustments
- Very stable at high humidity

Illustration ¹⁾

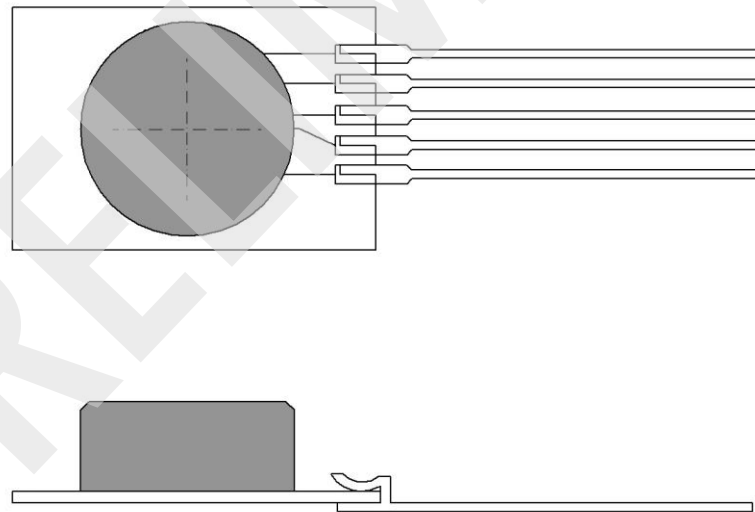

¹⁾ for actual size see dimensions in order information

Technical data

Operating temperature range:	-40 to + 125°C
Operating humidity range:	0 % RH to 100 % RH
Hysteresis:	< ±1 % RH
Digital interface:	I ² C, address 0x28
Measuring principle:	Capacitive polymer humidity sensor

	Humidity Sensor	Heater
Operating voltage:	2.7 V to 5.5 V	8 - 9 V (for regulated temperature)
Operating voltage limit:	-0.3 V to 6 V	0 - 9 V
Current consumption:	< 22 µA at 1 Hz measuring rate	
Current consumption (sleep):	< 1 µA	
Power consumption:		< 720 mW

	Humidity Sensor	Temperature Sensor
Accuracy:	23 °C: ± 1.8 % RH at 0 - 90 % RH ± 3.0 % RH at 90-100 % RH	0 to 60 °C: ± 0.2 °C
Reproducibility:	±0.2 % RH	±0.1 °C
Resolution:	0.03 % RH	+0.015 °C
Response time t_{63} :	< 10 s	< 10 s
Long-term drift:	< 0.5 % RH/a Exposure to VOCs can lead to higher values. Please find more details in application note AHHeatedHYT223_E and the section on thermal reconditioning.	< 0.05 °C/a



Thermal reconditioning


HYT223 contains a microheating structure which allows for thermal reconditioning. A reconditioning cycle is recommended in challenging atmospheres and conditions. Length and interval required depend on the application environment. A possible reconditioning setting is heating the module with 8 to 9 V and 700mW power for 10 minutes every 24 hours.

The temperature regulation is set in a way that the humidity sensor reaches a maximum of 120° C. When this regulation is activated, within the range of 8-9 V supply voltage, a constant temperature is reached.


With lower supply voltage heating is not regulated, but it can still be used with slightly higher fluctuations. The exact temperature reached at the humidity sensor depends on the thermal mass of the housing as well as the fixation of the sensor to it. Please refer to the application note for more information on heating and expected temperature ranges.

During reconditioning, the read-out values are not calibrated measurement data.

Mechanical Dimensions

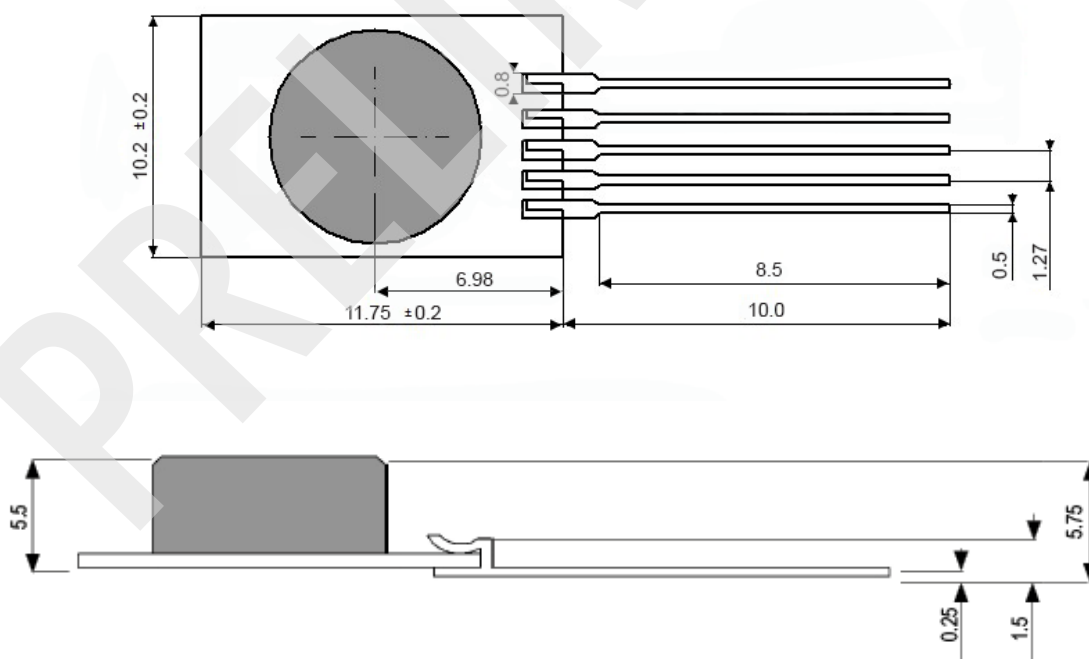

Pin Assignment

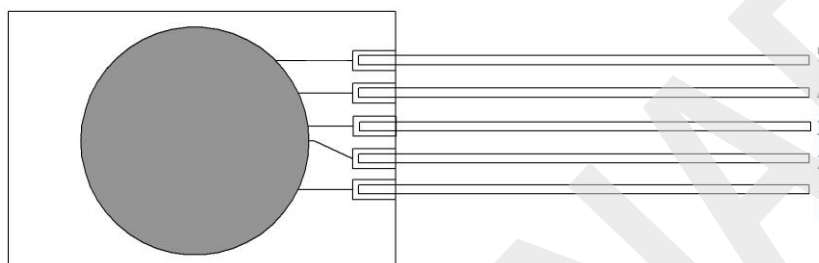

1	2	3	4	5
SDA	Ground	VDD	SCL	Heater

Order Information

	Heated HYT 223
Order code	151331

Additional Documents

	Document name:
Application Note:	AHHeatedHYT223_E
	AHHYTM_E



Innovative Sensor Technology IST AG • Stegrütstrasse 14 • 9642 Ebnat-Kappel • Switzerland
+41 71 992 01 00 • info@ist-ag.com • www.ist-ag.com

Technical specifications are subject to change without prior notice. The information contained in this data sheet has been carefully reviewed and is believed to be accurate; however, no liability is assumed for any errors or omissions. Continuous exposure to extreme operating conditions may impact product lifetime or reliability. The customer is solely responsible for assessing the suitability and fitness of the product for their specific application. This product is not designed, authorized, or warranted for use in life support or safety-critical applications. The customer agrees to hold the supplier harmless from any claims, damages, or liabilities arising from such use. No explicit or implied warranties, including but not limited to warranties of merchantability or fitness for a particular purpose, are provided. The material provided herein may not be reproduced, adapted, merged, translated, stored, or utilized in any form without prior written consent from the copyright holder. No transfer of any intellectual property rights is granted or implied. All rights reserved.