



TSic 506F/503F/501F



Temperature Sensor IC



For a fully calibrated and very accurate low power temperature measurement



Benefits & characteristics

- Fully calibrated
- Outstanding accuracy of ± 0.1 K
- Very low power consumption
- Excellent long-term stability
- Custom calibration and assembly available
- Available with digital, analog and ratiometric output signal
- Accuracy range of 40 K can be shifted (default: +5 °C to +45 °C)


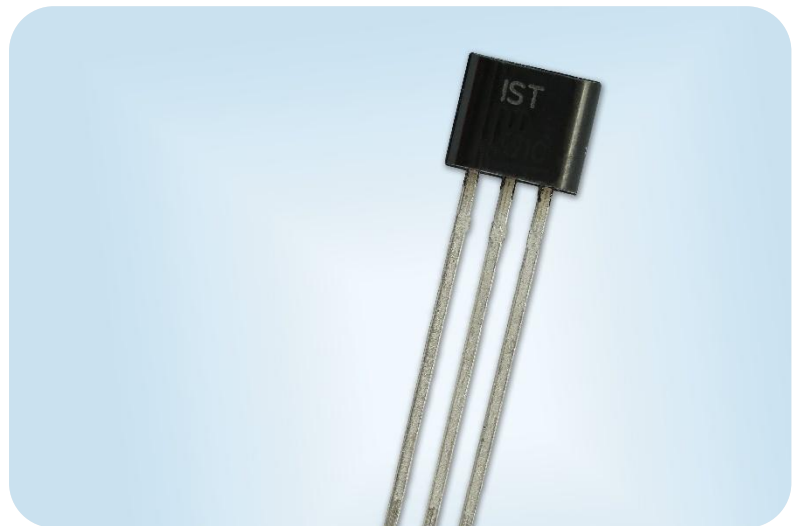


Illustration ¹⁾



¹⁾ for actual size see dimensions in order information

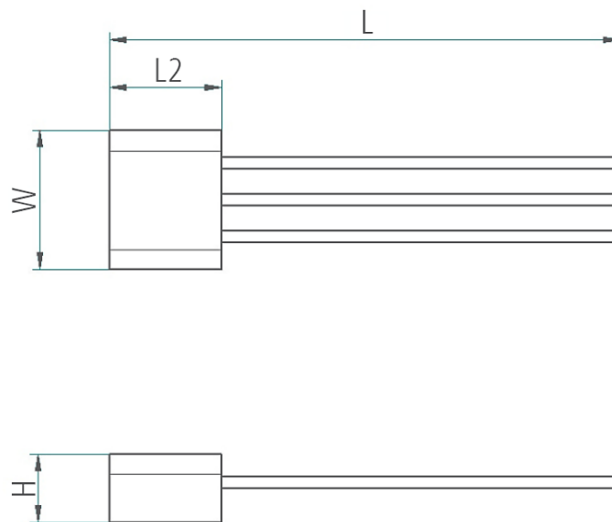


Technical Data

Dimensions (L / L2 x W x H in mm): ²⁾	17.30 / 3.81 x 4.57 x 2.3
Operating temperature range:*	-10 °C to +60 °C (-7 °C to +57 °C guaranteed)
Accuracy:*	±0.1 K in the range of +5 °C to +45 °C (other ranges upon request)
Resolution:*	0.034 K
Sampling rate:*	10 Hz
Supply voltage:	V _{dd} = 3 V to 5.5 V, high precision operation in range V _{dd} = 4.5 V to 5.5 V
Supply current:	typ. 30 µA at 25 °C and V _{dd} = 3.3 V for minimal self-heating
Packaging:*	TO92
Signal output:	Analog (TSic 501F), ratiometric (TSic 503F), digital (TSic 506F) – see application note ATTSic_E

* Customer-specific alternatives available

²⁾ For tolerances, see Application Note

Pin Assignment

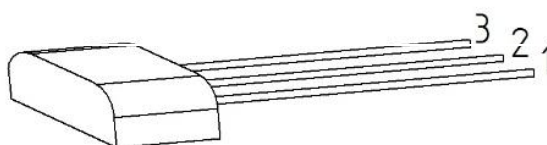

	Pin 1	Pin 2	Pin 3
TO92	GND	Signal	V _{dd} , Supply voltage (3 V to 5.5 V)



Absolute maximal ratings



Operating conditions

	Min	Typ	Max
Supply voltage to GND (V^+)	2.97 V	5 V	5.5 V
Supply current (I_{Vdd}) at $V_{dd} = 3.3$ V, RT	25 μ A	30 μ A	60 μ A
Operating temperature range (T_{amb})	-10 °C		+60 °C
Output load capacitance (C_L)			15 nF
External capacitance between V_{dd} and GND ³⁾	100 nF (recommended)		
Output load resistance between signal and GND (or V_{dd})	47 k Ω		

³⁾ Recommended as close to TSic V_{dd} and GND-Pins as possible

Temperature accuracies⁴⁾

T1: +5 °C to +45 °C	± 0.1 K
T2: -10 °C to +60 °C	± 0.2 K

⁴⁾ The sensor is calibrated at 5 V. The provided accuracy is applicable for a supply voltage between 4.5 V and 5.5 V. The accuracy is smaller with a supply voltage between 2.97 V and 4.5 V. For applications where the best accuracy at 3 V is requested, ask for a custom specific, 3 V calibrated device. Other TSic products with customer specific calibrations are available upon request, e.g. other temperature range for high accuracy. Accuracy at delivery; the assembly method can influence the accuracy!



Order Information – T092

Output signal	Accuracy	Order code	Reference	Output type	Packaging
501	±0.1 °C	103491	TSic 501F T092	Analog	T092
503	±0.1 °C	103519	TSic 503 T092 5V	Analog ratiometric	T092
506	±0.1 °C	103490	TSic 506F T092	Digital, ZACWire	T092

Additional Electronics

LabKit	Document name: DTTsicLabKit_E
--------	-------------------------------

Additional Documents

Application Note	Document name: ATTSic_E
------------------	-------------------------



Order Information

Temperature Sensor IC - Secondary reference



TSic



Accuracy

2	=	±0.5 °C at +80 °C range
3	=	±0.3 °C at +80 °C range
4	=	not defined
5	=	±0.1 °C at +40 °C range (limited measuring range from -10 °C to +60 °C)
6	=	not defined
7	=	±0.07 °C at +20 °C range (limited measuring range from -10 °C to +60 °C)



Bit size

0	=	11 bit
1	=	14 bit

Output signal

1	=	analog 0 V to 1 V
3	=	ratiometric 10 % to 90 % V _{dd}
6	=	digital ZACWire

Housing

SOP-8
T092

Special

E.g. „250 Hz“ for a high sampling rate or „-30/70“ for temperature and tolerance range

TSic 5 0 6 T092 -30/70



Innovative Sensor Technology IST AG • Stegrütistrasse 14 • 9642 Ebnat-Kappel • Switzerland
+41 71 992 01 00 • info@ist-ag.com • www.ist-ag.com

Technical specifications are subject to change without prior notice. The information contained in this data sheet has been carefully reviewed and is believed to be accurate; however, no liability is assumed for any errors or omissions. Continuous exposure to extreme operating conditions may impact product lifetime or reliability. The customer is solely responsible for assessing the suitability and fitness of the product for their specific application. This product is not designed, authorized, or warranted for use in life support or safety-critical applications. The customer agrees to hold the supplier harmless from any claims, damages, or liabilities arising from such use. No explicit or implied warranties, including but not limited to warranties of merchantability or fitness for a particular purpose, are provided. The material provided herein may not be reproduced, adapted, merged, translated, stored, or utilized in any form without prior written consent from the copyright holder. No transfer of any intellectual property rights is granted or implied. All rights reserved.